








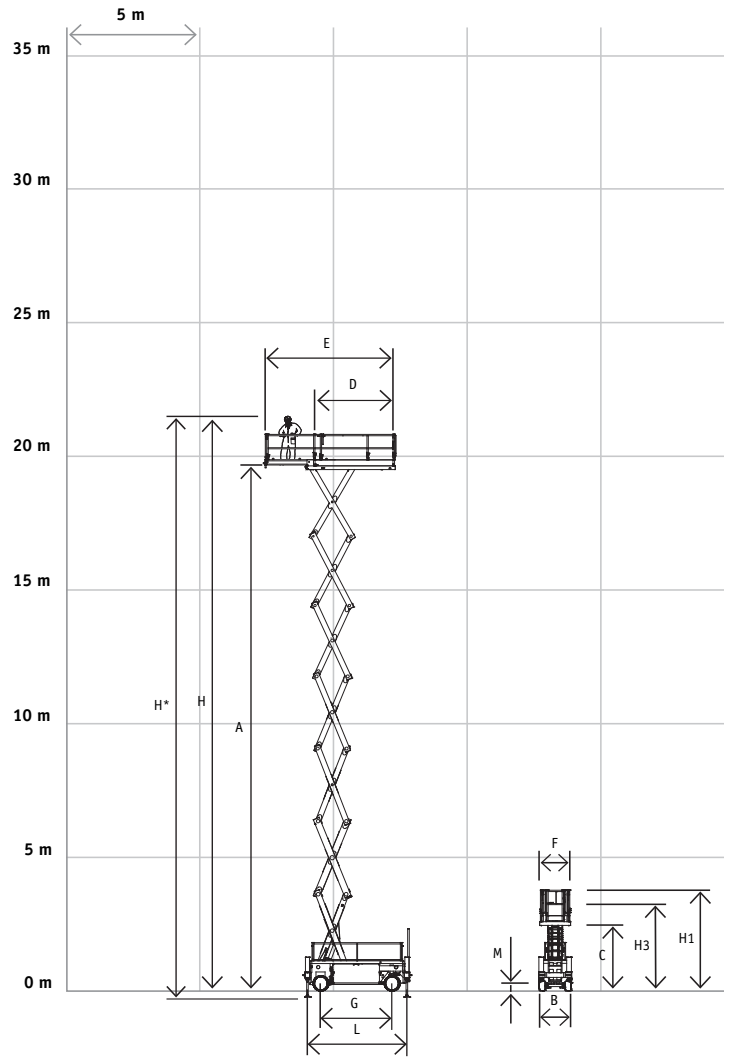


H (max.)	± 21.50 m
H* (max.)	--
A (max.)	± 19.50 m
C (min.)	± 2.58 m
DxF (min.)	3.38 x 1.16 m
ExF (max.)	4.88 x 1.36 m
H1	3.74 m
H3	3.01 m
LxB	4.05 x 1.26 m
G	2.67 m
M/N	148 mm/235 mm
∅ D	± 00 0
 (max.)	500 kg (2 pers. + 340kg)
 (max.)	500 kg (2 pers. + 340kg)
 (sec.)	90/55 sec.
 =	2.0 km/h
 =	0.5 km/h
 =	22 x 9 x 16
 (max.)	± 20%
	500 Ah/k5/48 V
	9.800 kg



OPTIONS

Controlbox with quick disconnect
Hourmeter
Charger (high frequency)
230V supply on platform
Driving at full height
Driving, proportional
Differential lock
Lubrication system Easy Lube

SAFETY FEATURES

Scissor skirt
Descent safety
Emergency descent
Drive alarm

APPLICATION

Indoors
Certified min. temperature -15°C